Technical Detail Drawing

Elasto-Deck 5000MR (Mechanical Room)

40 Mils DFT

TOP COAT: (OPTIONAL TEXTURED FINISH)
ELASTO-GLAZE 6001ALHT

4

- 115 Sq ft per gallon (10 Mils DFT)
- If a textured finish is required broadcast aggregate into the top coat 8-10 lbs per 100 Sq ft uniformly (Not to refusal) and back rolll

BASE COAT:
ELASTO-DECK 5001NG

3

- 45 Sq ft per gallon (30 Mils DFT)

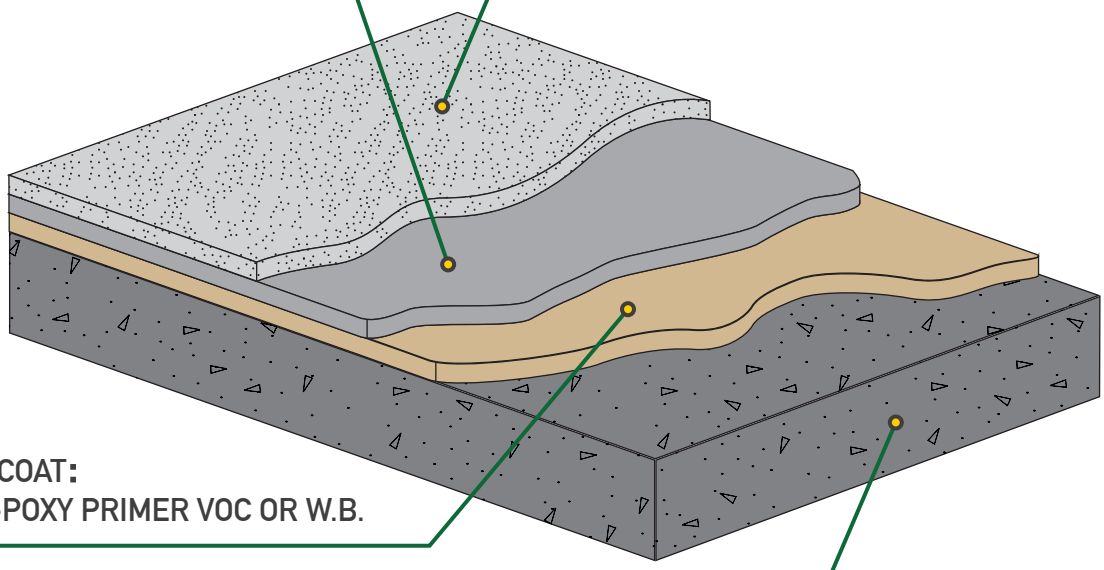

PRIMER COAT:
ELASTO-POXY PRIMER VOC OR W.B.

2

- 225-250 Sq ft per gallon (4 Mils DFT)

CONCRETE SUBSTRATE

1

(Prep surface, detail cracks, penetrations and flashing)