Technical Detail Drawing

Elasto-Deck 5000X2 (Pedestrian Traffic System)

Over occupied areas - 70 Mils DFT

SECOND BASE COAT:
ELASTO-DECK 5001NG

4

- 56 Sq ft per gallon (25 Mils DFT)

BROADCAST COAT:
ELASTO-GLAZE 6001ALHT

5

- 120 Sq ft per gallon (10 Mils DFT)
- Broadcast sand to refusal

BASE COAT:
ELASTO-DECK 5001NG

3

- 56 Sq ft per gallon (25 Mils DFT)

TOP COAT:
ELASTO-GLAZE 6001ALHT

6

- 110 Sq ft per gallon (10 Mils DFT)

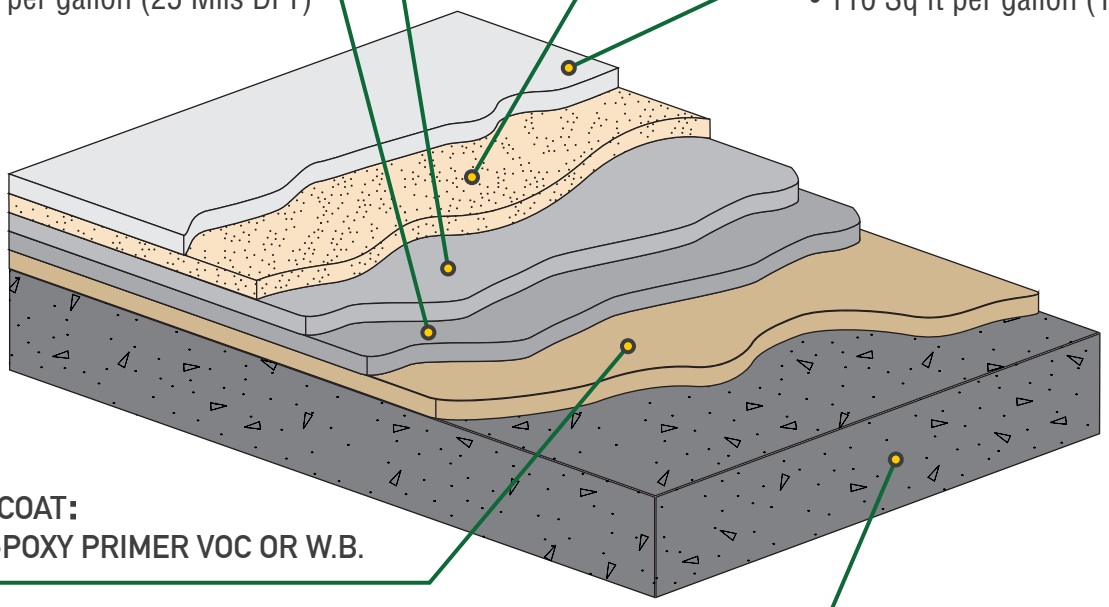

PRIMER COAT:
ELASTO-POXY PRIMER VOC OR W.B.

2

- 225-250 Sq ft per gallon (4 Mils DFT)

CONCRETE SUBSTRATE

1

(Prep surface, detail cracks, penetrations and flashing)