Technical Detail Drawing

Elasto-Deck 5000X2 (Pedestrian Traffic System-Plywood)

Over occupied areas - 70 Mils DFT

SECOND BASE COAT:
ELASTO-DECK 5001NG

4

- 56 Sq ft per gallon (25 Mils DFT)

BROADCAST COAT:
ELASTO-GLAZE 6001ALHT

5

- 120 Sq ft per gallon (10 Mils DFT)
- Broadcast sand to refusal

BASE COAT:
ELASTO-DECK 5001NG

3

- 56 Sq ft per gallon (25 Mils DFT)

TOP COAT:
ELASTO-GLAZE 6001ALHT

6

- 110 Sq ft per gallon (10 Mils DFT)

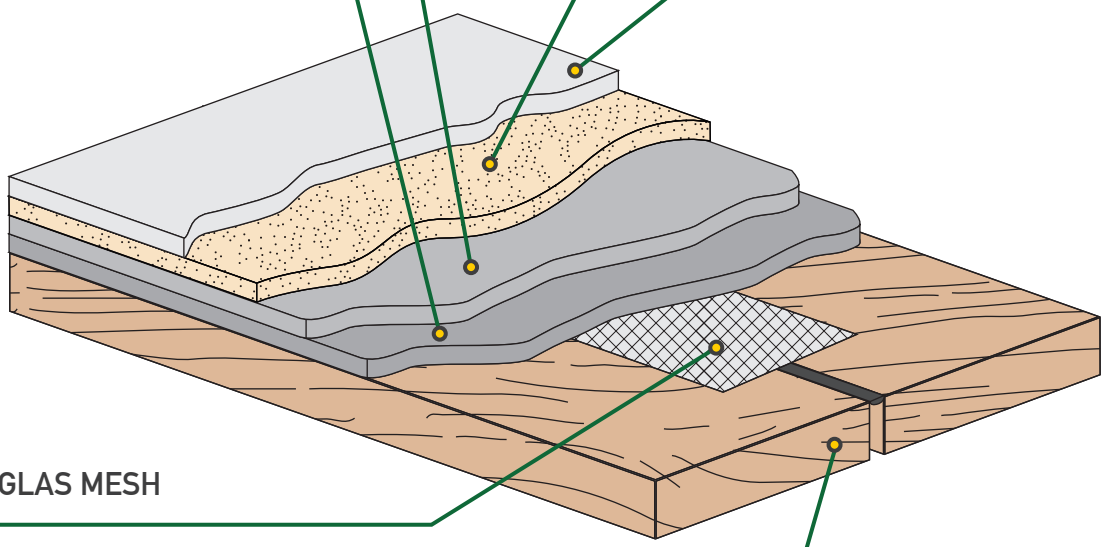

PERMA-GLAS MESH

2

PLYWOOD SUBSTRATE

1

Prep surface, Clean Dry, Seams and Flashing taped(Perma-Glas Mesh)