Technical Detail Drawing

Elasto-Deck 5500 (Under Tile System)

Over occupied areas - 68 Mils DFT

SECOND BASE COAT:
ELASTO-DECK 5500

4

- 45 Sq ft per gallon (28 Mils DFT)

BROADCAST COAT:
ELASTO-DECK 5500

5

- 100 Sq ft per gallon (12 Mils DFT)
- Broadcast sand to refusal

BASE COAT:
ELASTO-DECK 5500

3

- 45 Sq ft per gallon (28 Mils DFT)

FLOORING:

6

- Acrylic Modified Thinset
- Tile or Stone

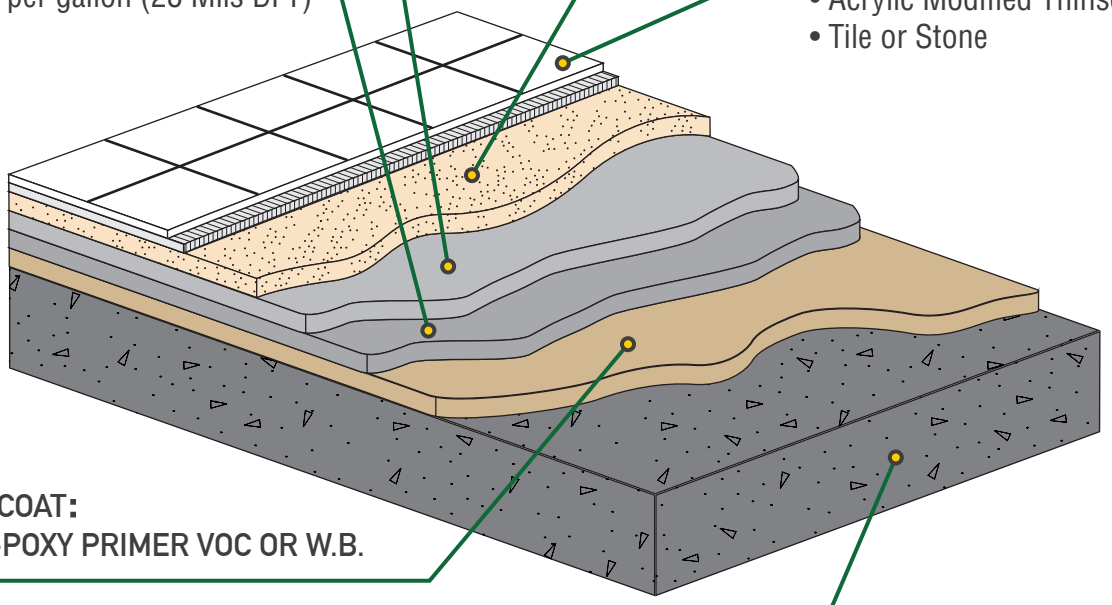

PRIMER COAT:
ELASTO-POXY PRIMER VOC OR W.B.

2

- 225-250 Sq ft per gallon (4 Mils DFT)

CONCRETE SUBSTRATE

1

(Prep surface, detail cracks, penetrations and flashing)