Technical Detail Drawing

Elasto-Deck 5500 (Under Tile System-Plywood)

Over occupied areas - 68 Mils DFT

SECOND BASE COAT:
ELASTO-DECK 5500

4

- 45 Sq ft per gallon (28 Mils DFT)

BROADCAST COAT:
ELASTO-DECK 5500

5

- 100 Sq ft per gallon (12 Mils DFT)
- Broadcast sand to refusal

BASE COAT:
ELASTO-DECK 5500

3

- 45 Sq ft per gallon (28 Mils DFT)

FLOORING:

6

- Acrylic Modified Thinset
- Tile or Stone

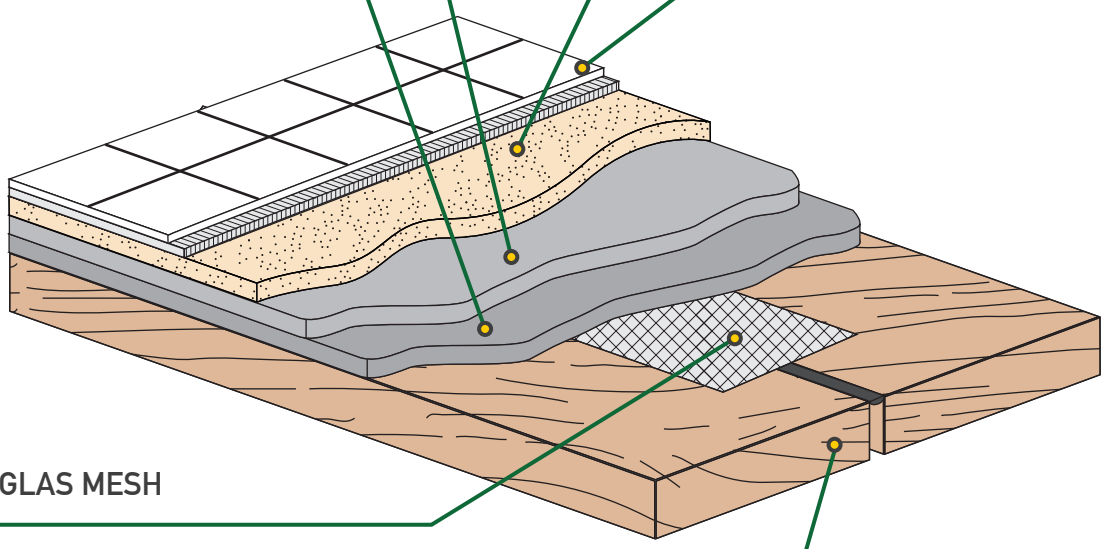

PERMA-GLAS MESH

2

PLYWOOD SUBSTRATE

1

Prep surface, Clean Dry, Seams and Flashing taped(Perma-Glas Mesh)