




Elasto-Deck 6500PT (Pedestrian Traffic - Concrete)

Over occupied areas - 40 Mils DFT

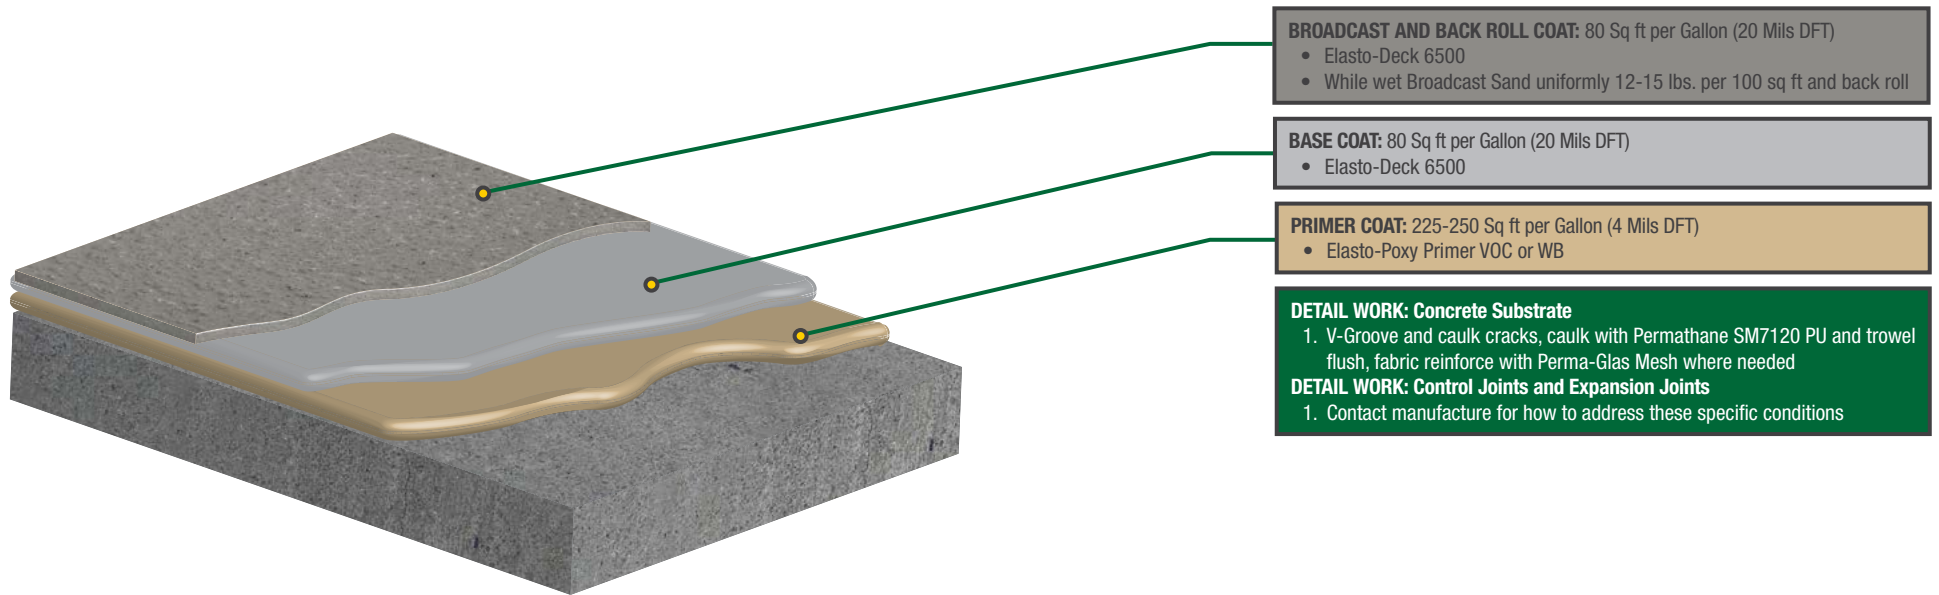

BROADCAST AND BACK ROLL COAT: 80 Sq ft per Gallon (20 Mils DFT)

- Elasto-Deck 6500
- While wet Broadcast Sand uniformly 12-15 lbs. per 100 sq ft and back roll

BASE COAT: 80 Sq ft per Gallon (20 Mils DFT)

- Elasto-Deck 6500

PRIMER COAT: 225-250 Sq ft per Gallon (4 Mils DFT)


- Elasto-Poxy Primer VOC or WB

DETAIL WORK: Concrete Substrate

1. V-Groove and caulk cracks, caulk with Permathane SM7120 PU and trowel flush, fabric reinforce with Perma-Glas Mesh where needed

DETAIL WORK: Control Joints and Expansion Joints

1. Contact manufacture for how to address these specific conditions

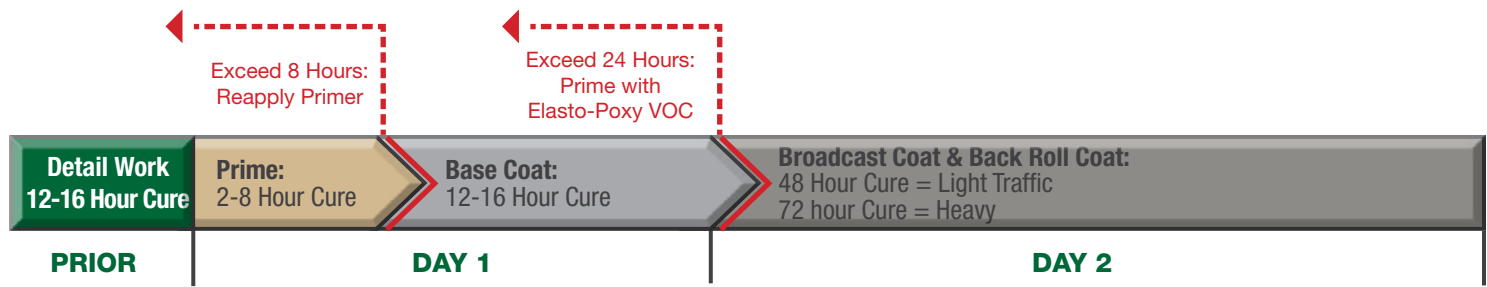



Elasto-Deck 6500PT (Pedestrian Traffic - Concrete)

Suggested Tools & Sundries



- Acetone/Xylene
- Blue Tape/Masking Tape
- Plastic Sheeting Roll
- Caulking gun
- Pool Trowel
- 1/8" Notched Trowel
- 1/8" Notched Squeegee w/ Handle
- Rubber Gloves
- Electric Drill
- Jiffy Mixing Paddle
- Screw Driver/Lid Opener
- Rags
- Chip Brush
- Push Broom
- Roller Handle with pole
- Roller Covers (Shed Free) 3/8" (Top Coat and Primers)
- Roller Covers (Shed Free) 3/4"-1" (Base coats)
- Empty Pail (Broadcast aggregate)
- Trash Bags
- Scissors