





# Elasto-Deck BT (Waterproofing - Plywood)

Over occupied areas - 90 Mils DFT

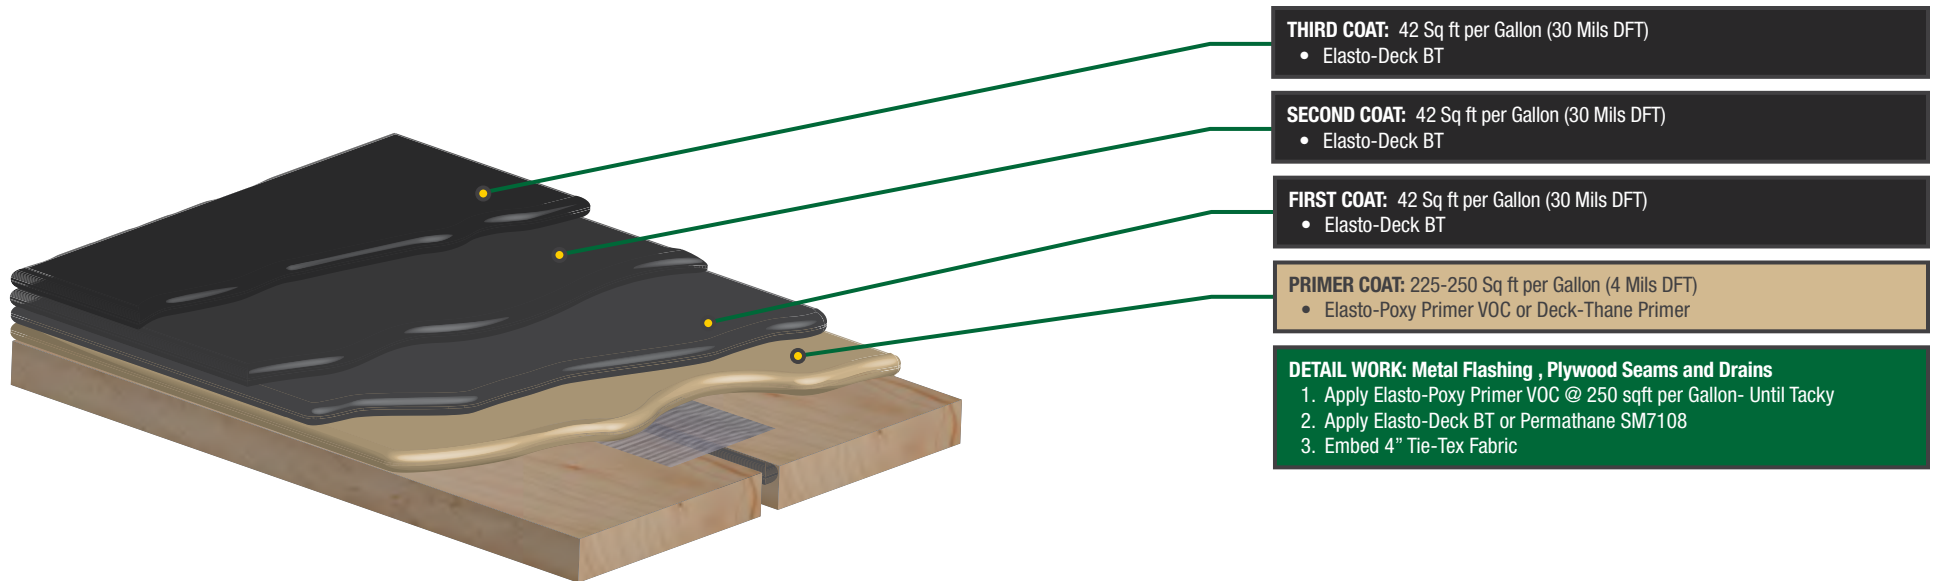

- THIRD COAT:** 42 Sq ft per Gallon (30 Mils DFT)
  - Elasto-Deck BT
- SECOND COAT:** 42 Sq ft per Gallon (30 Mils DFT)
  - Elasto-Deck BT
- FIRST COAT:** 42 Sq ft per Gallon (30 Mils DFT)
  - Elasto-Deck BT
- PRIMER COAT:** 225-250 Sq ft per Gallon (4 Mils DFT)
  - Elasto-Poxy Primer VOC or Deck-Thane Primer
- DETAIL WORK: Metal Flashing , Plywood Seams and Drains**
  1. Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon- Until Tacky
  2. Apply Elasto-Deck BT or Permathane SM7108
  3. Embed 4" Tie-TEX Fabric

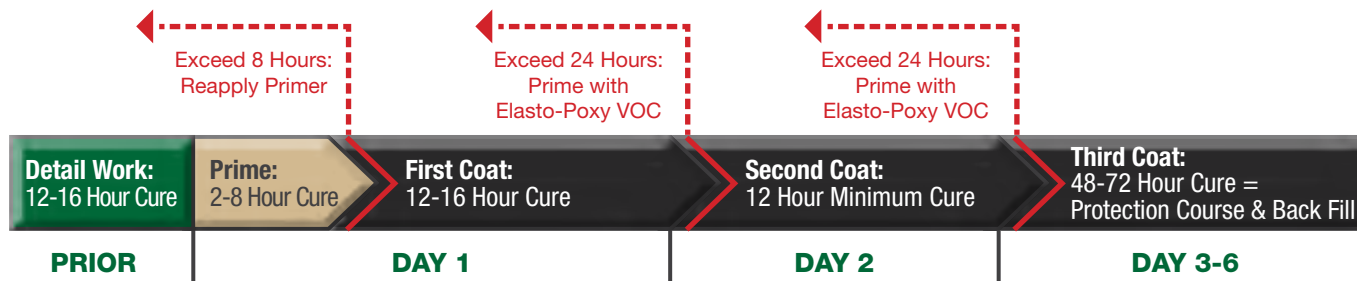



# Elasto-Deck BT (Waterproofing - Plywood)

## Suggested Tools & Sundries



- Acetone/Xylene
- Blue Tape/Masking Tape
- Plastic Sheeting Roll
- Caulking gun
- Pool Trowel
- 1/8" Notched Trowel
- 1/8" Notched Squeegee w/ Handle
- Rubber Gloves
- Electric Drill
- Jiffy Mixing Paddle
- Screw Driver/Lid Opener
- Rags
- Chip Brush
- Push Broom
- Roller Handle with pole
- Roller Covers 3/4"-1"
- Empty Pail (Broadcast aggregate)
- Trash Bags
- Scissors